



RS stock numbers : 257-076, 338-9823, 257-082

Flow Switch Series

Our range of Flow Switches are reed switch based devices which are manufactured in Acetal resin. These switches are designed for use in liquid flow systems up to 10 Bar pressure. Advanced design ensures minimal fluid flow restriction.

ELECTRICAL SPECIFICATIONS	ALL TYPES
Contact form	N/O
VA Rating	25
Breakdown Voltage DC	800
Switching Voltage AC	240
Switching Voltage DC	120
Switching Current maximum A	0.6

All ratings are for resistive load only


RS Stock Number	257-076	338-9823	257-082	
TECHNICAL SPECIFICATIONS	FS15A	FS15LFA	FS22A	
Operate Flow Rate*	litres/min	2.0	0.90	3.75
	US gals/min	0.53	0.24	0.99
Release Flow Rate**	litres/min	0.3	0.25	1.40
	US gals/min	0.08	0.07	0.37

* The switch will have operated when the flow rate rises above this value.

** The switch will have released when the flow rate falls below this value.

Installation

Flow switches can be mounted horizontally or vertically. As the operating piston is returned to it's original position by gravity the cap must always be upwards. Greater operate flow sensitivity is achieved with vertical installation. Supplied with 25cm Cable.

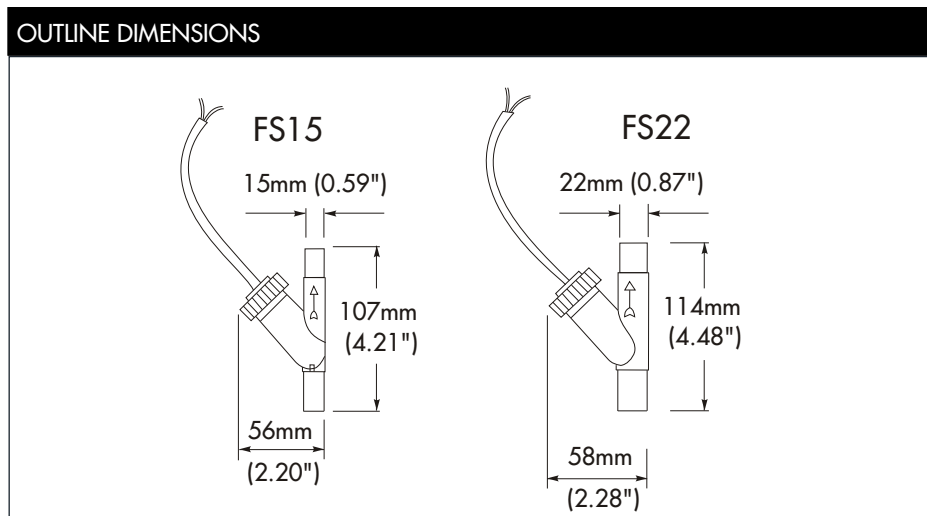

Every effort has been made to ensure that the descriptions and specifications quoted are correct, however, no liability can be accepted for any errors or omissions in this data. The detail specifications are subject to change without prior notice.

Flow-2000RS

CRYDOM

Control over power



- **Maximum Operating Pressure 10 bar. (140 PSI)**
- **Low flow version available**
- **WBS approval**
- **Temperature rated to 85°C (185°F)**

Crydom Magnetics Ltd
7 Cobham Road
Ferndown Industrial Estate
Wimborne
Dorset BH21 7PE
Tel: +44 (0) 1202 897969
Fax: +44 (0) 1202 891918
magnetics@crydom.com
www.crydom.co.uk